

RT850T Series

Solid State Relays

The complete package – universal compatibility, built-in 24 V transformer, silent operation, and unbeatable temperature control

MODELS & RATINGS

RT850T-240	4780 W @ 208 V	23 A resistive
	5520 W @ 240 V	23 A resistive
RT850T-347	7980 W @ 347 V	23 A resistive

All above models operate on 50/60 Hz



With transformer

SPECIFICATIONS

CONTROL SIGNAL

24 VAC / 40 mA

GUARANTEED OFF SIGNAL

V off < 5 VAC

TRANSFORMER RATINGS

24 VAC / 1.2 VA / Class 2

HUMIDITY LIMITS

0% to 95% non-condensing

TERMINAL WIRE SIZE

12 AWG

DIMENSIONS (H•W•D)

107 x 106 x 63 mm / 4.2 x 4.2 x 2.5 inches

FEATURES

Built-in 24 V transformer for easy installation

Compatible with 24 V thermostats with 2-wire connections (R, W) or 3-wire connections (R, W, C)


Enables superior temperature control when used with 15-second cycle thermostats

Heating command indicator light gives at-a-glance verification of relay operation

Simple installation in standard 4" x 4" electrical box

Terminal board connection enables easy installation

INSTALLATION

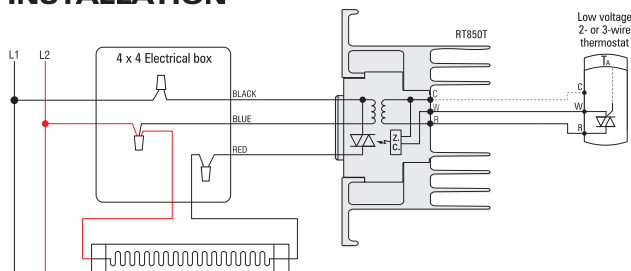

3 year warranty

COMPATIBLE WITH AUBE THERMOSTATS:

TH114-A-024T-15S

TH115-A-024T-15S

TH150 Series